

INSTRUCTIONS

Water Tank Base



Includes:
Water Tank
Metal Plates (2)
Screw
Peg



1

Lift water tank so that it is positioned vertically.



2

Place the first metal plate in the indentation located on the underside of the tank.



3

Slide the metal screw through the hole in the center of the metal plate you placed on the underside of the tank in step 2.




4

While holding the screw in place on the underside of the tank, place the second metal plate in the indentation on the top of the tank. The metal screw will slide through the hole at the center of the plate.



5

Still holding the screw in place on the underside of the tank, place the peg on the screw on the top of the tank. Holding the base of the peg, twist the peg clockwise until it is secured.

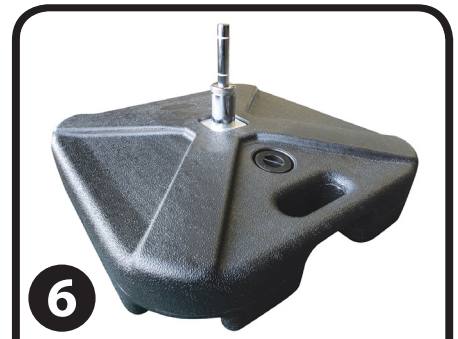

6

Fill the water tank for use by unscrewing the cap on the top of the tank. Replace cap prior to use.



This product is for outdoor promotional use only and should not be left out in extreme weather conditions. Please use common sense guidelines and do not display this product outdoors when extreme winds or storms may be present.